

## MBV-132DT/B/S三片式不銹鋼金屬硬密封球閥


產品特徵：

SPECIFICATIONS

- \*公稱壓力：3/8" ~4" Class 600  
Working Pressure: 3/8" ~4" Class 600
- \*防爆中軸設計，防靜電裝置  
Blow-Out Proof Stem Design, Antistatic Device
- \*精密鑄造 Investment Casting
- \*ISO5211直接安裝執行器機構平臺設計  
ISO5211 Direct-Mounting of Actuators of Valves Design
- \*連接形式：內螺紋/對焊/承插焊  
End Types: Female Threaded/Butt Weld/Socket Weld
- \*掛鎖裝置 Locking Device



型號：MBV-132DT/B/S

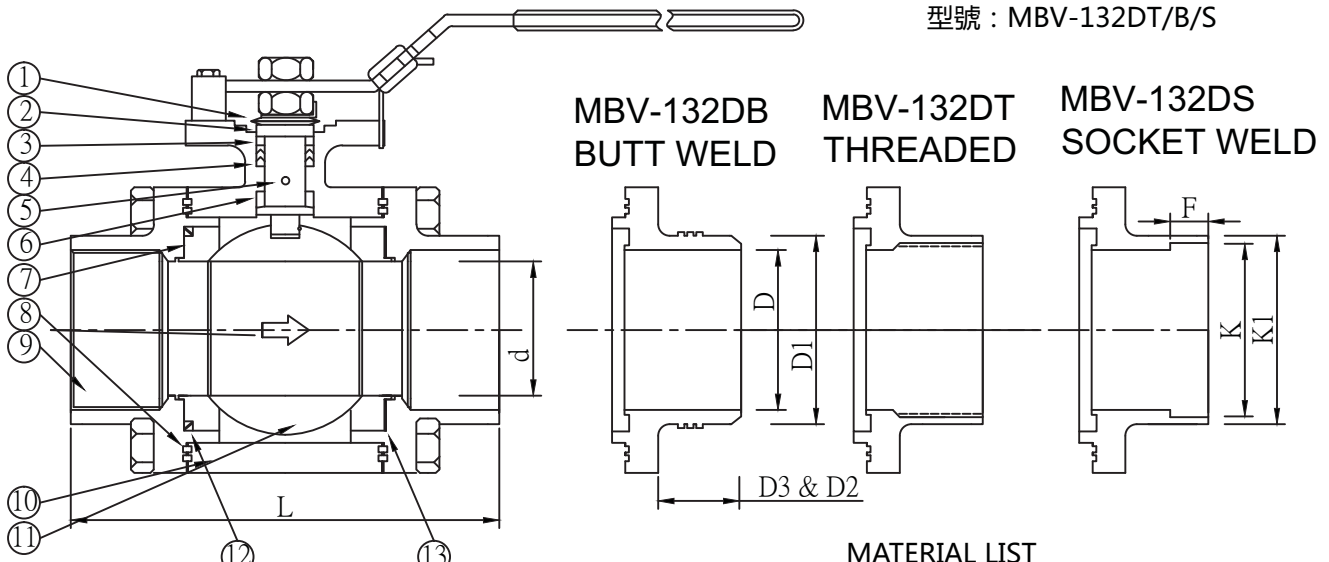

**MATERIAL LIST**

No.	PART NAME	CF8M	WCB
1	Belleville Washer	SS304	SS304
2	Packing Gland	SS304	SS304
3	Thrust Bearing	GRAPHITE	
4	Stem Packing	GRAPHITE	
5	Stem	SS316	
6	Thrust Bearing	NITRONIC	
7	Seat	SS316+STELLITE	
8	Gasket	GRAPHITE	
9	End Cap	CF8M	WCB
10	Body	CF8M	WCB
11	Ball	SS316+HARD CHROME	
12	Spring	INCONEL	
13	Seat Seal	GRAPHITE	

**DIMENSIONS**

UNIT:MM

SIZE	d	D	D1	K	K1	F	ISO	L(BT)	L(BW)	L(SW)	H	S	PCD	d1	w	M	D2	D3
3/8"	12.7	12.7	18	17.5	25.9	9.91	F04	69.1	122	122	7.11	13.5	41.9	11.9	6.35	#10-24UNC		
1/2"	15	15	21.6	21.6	31.5	9.91	F04	73.9	124	124	7.11	13.5	41.9	11.9	6.35	#10-24UNC		
3/4"	20.1	20.1	27.2	27.2	38.6	13	F04	86.1	131	131	7.11	13.5	41.9	11.9	6.35	#10-24UNC	76.2	38.1
1"	24.9	24.9	34	33.8	42.9	13	F05	94	133	133	11.2	18.8	50	14	8	1/4-20UNC	76.2	38.1
1.5"	39.9	39.9	48.5	48.5	62	13	F07	117	157	157	13.5	22.4	70.1	16	9.5	5/16-18UNC	76.2	38.1
2"	50	50	60.5	61.2	74.9	16	F07	132	168	168	13.5	22.4	70.1	16	9.5	5/16-18UNC	76.2	38.1&50.8
3"	75.9	75.9	88.9	89.4	109	24.9	F10	222	254	254	44.5	70.1	102	27.9	17	1/2-13UNC		
4"	100	100	114	115	135	30	F12	343	432	432	51.6	73.9	125	34	26	1/2-13UNC		